

Web TCT Tool Packaging Guide

Version 1.0, for Tizen 2.3.1

Copyright © 2015 Intel Corporation and Samsung Electronics Co., Ltd. No portions of this document may be reproduced without the written permission of Intel Corporation.

Intel is a trademark of Intel Corporation in the U.S. and/or other countries.

Linux is a registered trademark of Linus Torvalds.

Tizen® is a registered trademark of The Linux Foundation.

ARM is a registered trademark of ARM Holdings Plc.

*Other names and brands may be claimed as the property of others.

Any software source code reprinted in this document is furnished under a software license and may only be used or copied in accordance with the terms of that license.

Contents

1	Overview.....	3
2	Web TCT.....	3
3	Prerequisites.....	4
4	How to Package Web TCT.....	5
	Appendix-1 Package List File Sample.....	11
	Appendix-2 Test Plan File Samples	13

1 Overview

This document is intended for developers who contribute Web TCT development.

You are supposed to have gained the following knowledge:

- Where to download TIZEN SDK 2.3.1
- Where to download source code of TCT-manager, TCT-shell, TCT-utilities
- Where to download source code of TCT test suites
- Where to download source code of testkit-lite, testkit-stub, tinyweb

2 Web TCT

Web TCT release is provided as an all-in-one tar ball in layout as below.

```
[TCT-<version>-<revision>]/
├── [doc]/
│   ├── <Tool Name>-User Guide-<version>.pdf
│   └── Release Notes
├── [package]/
│   ├── [common]/
│   ├── [wearable]/
│   ├── [mobile]/
│   └── [pkg_infos]/
├── [resource]/
│   ├── [testkit-stub]/
│   ├── [tinyweb]/
│   ├── getCap.wgt
│   ├── tct-testconfig-<version>.zip
│   ├── org.tizen.datacontrolprovider-1.0.0-arm.tpk
│   └── org.tizen.datacontrolprovider-1.0.0-i386.tpk
├── [tools]/
│   ├── [manager]/
│   ├── [shell]/
│   ├── [testkitlite]/
│   ├── [sdb]/
│   ├── tct-mgr
│   ├── tct-shell
│   ├── testkit-lite
│   ├── full_pkg_generator
│   ├── tct-config-host.py
│   ├── healthcheck.ini
│   └── tct-config-device.py
```

- TCT-<version>-<revision>: Final name of a Web TCT release.

- Doc:
 - Web-TCT User Guide
 - TCT-manager User Guide
 - TCT-shell User Guide
 - TCT-behavior User Guide
 - TCT-tool-packaging User Guide
 - Release Notes
- Package:
 - [common]: TIZEN common test packages for every profile
 - [wearable]: TIZEN wearable specified test packages
 - [mobile]: TIZEN mobile specified test packages
 - [pkg_infos]: contains test packages list file for each TIZEN profile
For tizen_2.3.1, we have two profiles: wearable and mobile
- Resource:
 - [testkit-stub]/: contains arm/IA executable binaries of testkit-stub
 - [tinyweb]/: contains arm/IA executable binaries of tinyweb
 - getCap.wgt: a widget used to get capabilities of TIZEN target
 - tct-testconfig-<version>.zip: a common test configuration file for web test suites
 - org.tizen.datacontrolprovider-1.0.0-arm.tpk: a native package for testing datacontrol module on a mobile device
 - org.tizen.datacontrolprovider-1.0.0-i386.tpk: a native package for testing datacontrol module on a mobile emulator
- Tools:
 - [manager]/: contains the jar and resource of tct-manager
 - [shell]/: executable files and resource of tct-shell
 - [testkitlite]/: executable files and resource of testkit-lite
 - [sdb]/: TIZEN sdb tool, 32bit/64bit
 - tct-mgr: launcher of tct-manager
 - tct-shell: launcher of tct-shell
 - full-pkg-generator: launcher of package list generation tool
 - testkit-lite: launcher of testkit-lite
 - tct-config-host.py: deployment script for tools in Host side
 - tct-config-device.py: deployment script for tools in Device side
 - healthcheck.ini: configure file for tct-config-device.py

3 Prerequisites

- One of the following Linux Distribution versions is installed
 - Windows 7 (32-bit)
 - Windows 7 (64-bit)
 - Ubuntu 12.04 (32-bit)
 - Ubuntu 12.04 (64-bit)
 - Ubuntu 12.10 (32-bit)
 - Ubuntu 12.10 (64-bit)
- Oracle JDK7 or Open-JDK7 is installed.

- TIZEN SDK 2.3.1 is installed (You need to select all components when install it).
- TIZEN Widget Signing Tool.
- Java build tool ant is installed. You can use the command below to install it.

```
$ sudo apt-get install ant
```

- Python 2.7
- Zip : package and archive tool

4 How to Package Web TCT

- **Download TCT utilities to prepare layout of the tar ball**

- Use git clone to get tct-utilities from Tizendev.org
- ```
$ git clone ssh://<uid>@review.tizendev.org:29418/test/tct/utilities.git tct-utilities
```
- ```
$ cd tct-utilities && git checkout tizen_2.3.1
```

Layout of a new initialized tct-utilities project as below

```
├─ [tct-utilities]/
│  └─ [doc]/
│     ├── <***>-User Guide-<version>.pdf
│     └─ Release Notes
│  └─ [package]/
│     ├── [common]
│     ├── [wearable]
│     ├── [mobile]
│     └─ [pkg_infos]
│  └─ [resource]/
│     └─ [GetCap]/
│  └─ [tools]/
│     ├── [manager]/
│     ├── [shell]/
│     ├── tct-mgr
│     ├── tct-shell
│     ├── testkit-lite
│     ├── full_pkg_generator
│     ├── tct-config-host.py
│     ├── healthcheck.ini
│     └─ tct-config-device.py
```

- Update Release Notes according to updates

- **Download TCT test suite source codes and build test packages (zip)**

- Use git clone to get source code of TCT test suites from Tizendev.org
- ```
$ git clone ssh://<uid>@review.tizendev.org:29418/test/tct/webapi.git
```
- ```
$ git clone ssh://<uid>@review.tizendev.org:29418/test/tct/webuifw.git
```

- \$ git clone ssh://<uid>@review.tizendev.org:29418/test/tct/wrt.git
- \$ git clone ssh://<uid>@review.tizendev.org:29418/test/tct/behavior.git
- \$ cd /path/to/webapi && git checkout tizen_2.3.1
- \$ cd /path/to/webuifw && git checkout tizen_2.3.1
- \$ cd /path/to/wrt && git checkout tizen_2.3.1
- \$ cd /path/to/behavior && git checkout tizen_2.3.1
- Use the packing script in the project to build all test packages (*.zip)
For detailed steps of test suites packaging, please refer to the document
“Web_TCT_2.3.1_TestSuite_Packaging_Guide_v1.0.pdf”
- Copy test suite packages to sub folders of “package/” according to actual profile
/path/to/tct-utilities/package/wearable
/path/to/tct-utilities/package/mobile

- **Copy tct-testconfig-<version>.zip to /path/to/tct-utilities/resource/**

tct-testconfig is already packaged in the previous step, we just need to copy it.


- **Build wgt distribution for getCap from source code**

- Build and sign getCap wgt file
- \$ cd /path/to/tct-utilities/resource/GetCap/src
- \$ zip -rq /path/to/tct-utilities/resource/getCap.wgt *
- \$ /path/to/tizen-signing-tool/sign-widget.sh --dist platform /path/to/tct-utilities/resource/getCap.wgt
- \$ rm -rf /path/to/tct-utilities/resource/GetCap/

- **Download source code of TCT manager and build executable files**

- Use git clone to get source code of tct-manager
- \$ git clone ssh://<uid>@review.tizendev.org:29418/test/tct/manager.git tct-manager
- \$ cd /path/to/tct-manager && git checkout tizen_2.3.1
- Make a directory src_jaxb and run ant to initialize it
- \$ mkdir src_jaxb
- \$ ant
- Copy the folder /path/to/tct-manager/dest/manager to /path/to/tct-utilities/tools/

Replace the existed folders or files with same name. The layout should be as below



- **Download source code of TCT-shell and copy it to tools folder**


- Use git clone to get source code of tct-shell

```
$ git clone ssh://<uid>@review.tizendev.org:29418/test/tct/shell.git shell
```

```
$ cd /path/to/shell && git checkout tizen_2.3.1
```

- Copy the folder /path/to/shell to /path/to/tct-utilities/tools/

Replace the existed folders or files with same name. The layout should be as below



- **Download source code of testkit-lite and copy it to tools folder**


- Use git clone to get source code of testkit-lite from Github

```
$ git clone git@github.com:testkit/testkit-lite.git testkitlite
```

```
$ cd /path/to/testkitlite && git checkout tizen_2.3.1
```

- Copy the folder /path/to/testkitlite to /path/to/tct-utilities/tools/

The layout should be as below



- **Download source code and build testkit-stub**

- Download source code of testkit-stub from Github

```
$ git clone git@github.com:testkit/testkit-stub.git
```

```
$ cd /path/to/testkit-stub && git checkout tizen_2.3.1
```

- Build ARM/IA binaries of testkit-stub for Web TCT

```
$ cd /path/to/testkit-stub/CommandLineBuild
```

```

### build ARM
- $ /path/to/tizen-sdk/tools/native-make clean
- $ /path/to/tizen-sdk/tools/native-make -a armel -t GCC-4.5
- $ mkdir arm && cp testkit-stub arm/

### build IA
- $ /path/to/tizen-sdk/tools/native-make clean
- $ /path/to/tizen-sdk/tools/native-make -a i386 -t GCC-4.5
- $ mkdir ia && cp testkit-stub ia/

### make testkit-stub folder
- $ mkdir /path/to/tct-utilities/resource/testkit-stub

- Copy arm and ia binaries to /path/to/tct-utilities/resource/testkit-stub
  according to layout
  └─ [resource]/
    └─ [testkit-stub]/
      └─ [arm]
        └─ testkit-stub
      └─ [ia]
        └─ testkit-stub

```

- **Download source code and build tinyweb**

- Download source code of tinyweb from Github

```

- $ git clone git@github.com:testkit/tinyweb.git
- $ cd /path/to/tinyweb && git checkout tizen_2.3.1

```

- Build ARM/IA binaries of testkit-stub for Web TCT

```

- $ cd /path/to/tinyweb/CommandLineBuild

### build ARM
- $ /path/to/tizen-sdk/tools/native-make clean
- $ /path/to/tizen-sdk/tools/native-make -a armel -t GCC-4.5
- $ mkdir arm
- $ cp tinyweb arm/
- $ cp cgi-getcookie arm/
- $ cp cgi-getfield arm/
- $ cp server.pem arm/
- $ cp *.so arm/

```


```

#### build IA
- $ /path/to/tizen-sdk/tools/native-make clean
- $ /path/to/tizen-sdk/tools/native-make -a i386 -t GCC-4.5
- $ mkdir ia
- $ cp tinyweb ia/
- $ cp cgi-getcookie ia/
- $ cp cgi-getfield ia/
- $ cp server.pem ia/
- $ cp *.so ia/

#### make tinyweb folder
- $ mkdir /path/to/tct-utilities/resource/tinyweb


```

- Copy arm and ia binaries to /path/to/tct-utilities/resource/tinyweb according to layout below

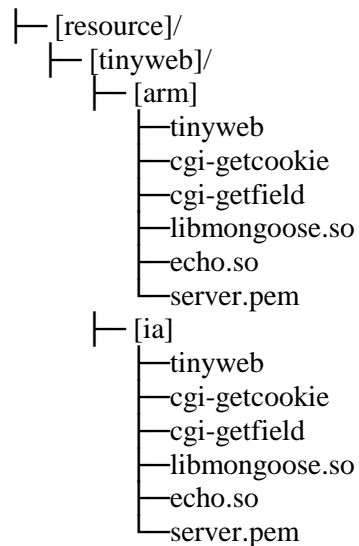

- **Download TIZEN sdb tool**

- Download sdb 32bit version and sdb 64bit version from tizendev.org release
- Unzip the package and copy sdb to /path/to/tct-utilities/tools/ according to layout



- **Packaging the tar ball of Web TCT**

- Rename the /path/to/tct-utilities/ to /path/to/TCT-<version>-<revision>

- Compress the TCT-<version>-<revision> to tar ball for release

Appendix-1 Package List File Sample

The package list xml file contains all the test suite package information

```
<?xml version="1.0" encoding="UTF-8"?>
<ns3:testplan xmlns:ns3="http://www.example.org/plan/" xmlns="">
  <suite name="tct-webdatabase-w3c-tests" launcher="WRTLancher"
category="W3C/HTML5 APIs">
    <auto_tcn>50</auto_tcn>
    <manual_tcn>0</manual_tcn>
    <total_tcn>50</total_tcn>
    <pkg_name>tct-webdatabase-w3c-tests-2.3.1.zip</pkg_name>
  </suite>
  <suite name="tct-jsenhance-html5-tests" launcher="WRTLancher"
category="W3C/HTML5 APIs">
    <auto_tcn>6</auto_tcn>
    <manual_tcn>0</manual_tcn>
    <total_tcn>6</total_tcn>
    <pkg_name>tct-jsenhance-html5-tests-2.3.1.zip</pkg_name>
  </suite>
  <suite name="tct-multicolumn-css3-tests" launcher="WRTLancher"
category="W3C/HTML5 APIs">
    <auto_tcn>141</auto_tcn>
    <manual_tcn>18</manual_tcn>
    <total_tcn>159</total_tcn>
    <pkg_name>tct-multicolumn-css3-tests-2.3.1.zip</pkg_name>
  </suite>
  <suite name="tct-messaging-mms-tizen-tests" launcher="WRTLancher"
category="Tizen Web Device APIs">
    <auto_tcn>122</auto_tcn>
    <manual_tcn>0</manual_tcn>
```

```
<total_tcn>122</total_tcn>
  <pkg_name>tct-messaging-mms-tizen-tests-2.3.1.zip</pkg_name>
</suite>
  <suite name="tct-workers-w3c-tests" launcher="WRTLauncher"
category="W3C/HTML5 APIs">
  <auto_tcn>85</auto_tcn>
  <manual_tcn>1</manual_tcn>
  <total_tcn>86</total_tcn>
  <pkg_name>tct-workers-w3c-tests-2.3.1.zip</pkg_name>
</suite>
  <suite name="tct-namespace-tizen-tests" launcher="WRTLauncher"
category="Tizen Web Device APIs">
  <auto_tcn>25</auto_tcn>
  <manual_tcn>0</manual_tcn>
  <total_tcn>25</total_tcn>
  <pkg_name>tct-namespace-tizen-tests-2.3.1.zip</pkg_name>
</suite>
</ns3:testplan>
```

Appendix-2 Test Plan File Samples

Full_test_mgr.xml is a test plan which contains all suites, both auto and manual tests.

```
<?xml version="1.0" encoding="UTF-8"?>
<ns3:testplan xmlns:ns3="http://www.example.org/plan/" xmlns=""
name="Full_test">
  <execute_type>All</execute_type>
  <suite name="tct-webdatabase-w3c-tests" launcher="WRTLancher"
category="W3C/HTML5 APIs">
    <auto_tcn>50</auto_tcn>
    <manual_tcn>0</manual_tcn>
    <total_tcn>50</total_tcn>
    <pkg_name>tct-webdatabase-w3c-tests-2.3.1.zip</pkg_name>
  </suite>
  <suite name="tct-jsenhance-html5-tests" launcher="WRTLancher"
category="W3C/HTML5 APIs">
    <auto_tcn>6</auto_tcn>
    <manual_tcn>0</manual_tcn>
    <total_tcn>6</total_tcn>
    <pkg_name>tct-jsenhance-html5-tests-2.3.1.zip</pkg_name>
  </suite>
  <suite name="tct-messaging-mms-tizen-tests" launcher="WRTLancher"
category="Tizen Web Device APIs">
    <auto_tcn>122</auto_tcn>
    <manual_tcn>0</manual_tcn>
    <total_tcn>122</total_tcn>
    <pkg_name>tct-messaging-mms-tizen-tests-2.3.1.zip</pkg_name>
  </suite>
  <suite name="tct-multicolumn-css3-tests" launcher="WRTLancher"
category="W3C/HTML5 APIs">
```

```

    <auto_tcn>141</auto_tcn>
    <manual_tcn>18</manual_tcn>
    <total_tcn>159</total_tcn>
    <pkg_name>tct-multicolumn-css3-tests-2.3.1.zip</pkg_name>
  </suite>

  <suite name="tct-workers-w3c-tests" launcher="WRTLauncher"
category="W3C/HTML5 APIs">
    <auto_tcn>85</auto_tcn>
    <manual_tcn>1</manual_tcn>
    <total_tcn>86</total_tcn>
    <pkg_name>tct-workers-w3c-tests-2.3.1.zip</pkg_name>
  </suite>
</ns3:testplan>

```

Full_auto_shell.xml is a test plan which only contains the auto suites.

```

<ns3:testplan name="Full_auto_shell" xmlns=""
xmlns:ns3="http://www.example.org/plan/">
  <execute_type>Auto</execute_type>
  <suite launcher="WRTLauncher" name="tct-animationtiming-w3c-tests">
    <auto_tcn>11</auto_tcn>
    <manual_tcn>7</manual_tcn>
    <total_tcn>18</total_tcn>
    <pkg_name>tct-animationtiming-w3c-tests-2.3.1.zip</pkg_name>
  </suite>
  <suite launcher="WRTLauncher" name="tct-batterystatus-w3c-tests">
    <auto_tcn>23</auto_tcn>
    <manual_tcn>0</manual_tcn>
    <total_tcn>23</total_tcn>
    <pkg_name>tct-batterystatus-w3c-tests-2.3-1.zip</pkg_name>
  </suite>

```

```
<suite launcher="WRTRLauncher" name="tct-audio-html5-tests">
  <auto_tcn>171</auto_tcn>
  <manual_tcn>1</manual_tcn>
  <total_tcn>172</total_tcn>
  <pkg_name>tct-audio-html5-tests-2.3.1.zip</pkg_name>
</suite>

<suite launcher="WRTRLauncher" name="tct-ext02-wrt-tests">
  <auto_tcn>7</auto_tcn>
  <manual_tcn>0</manual_tcn>
  <total_tcn>7</total_tcn>
  <pkg_name>tct-ext02-wrt-tests-2.3.1.zip</pkg_name>
</suite>

</ns3:testplan>
```